

ALL NOISE CONTROL

SERIES 3300 CUSTOM ACCORDION DOORS




Dual-wall doors for moderate sound reduction.

One of the most attractive ways to literally draw the line between loud and quiet, the Series 3300 is perimeter-sealed and acoustic-lined for wonderful sound insulation.

Matching dual-wall construction with the proven durability of All Noise Control exclusive hardware hinge system and rigid body panels, the Series 3300 also conveniently allows the selection of alternate finish materials on each door face.

Field Sound Transmission Class:

The dual-walled Series 3300 Acoustical Partition has a field sound transmission class (FSTC) rating of 33. Field tests were performed by Bruck, Richards & Chaudiere, Inc. of Seattle, Washington following the procedures specified in ASTM designation E 336-90.

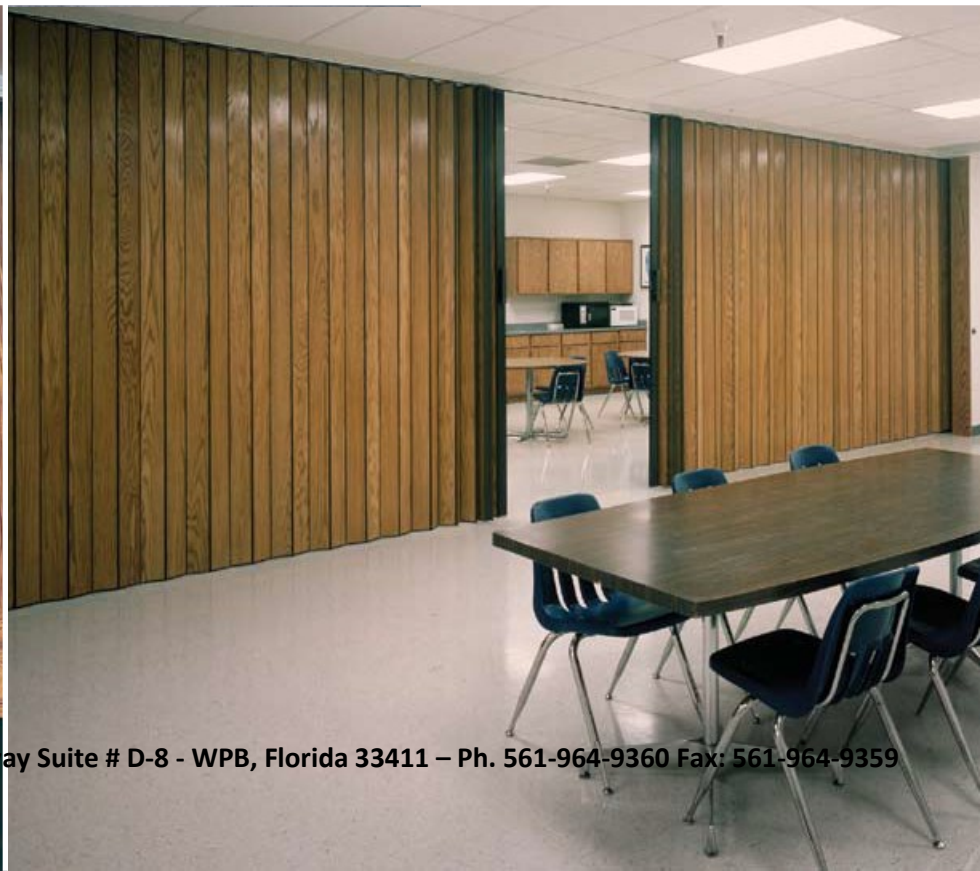

ALL NOISE CONTROL SERIES 3300

All Noise Control Series 3300 is proven in such application as offices, churches and restaurants where moderate sound control is desired, along with the flexibility and convenience of an accordion-style partition that features solid panels.

As with every All Noise Control custom accordion door the Series 3300 is made to exactly fit your opening, which means no trimming to fit. It is entirely top suspended with no requirement for floor clips or pivots. To meet the needs of any installation, All Noise Control also offers a variety of options including locks, latches, multiple meeting posts and the selection of alternate finish materials on each door face.

The Nuts And Bolts of Our Nuts And Bolts

Our exclusive steel hardware hinge system is designed to keep doors operating smoothly and lends fantastic strength and long-term durability. It also means the doors stay solidly in place while both open and closed.

Available Finishes

Natural hardwoods, woodgrain vinyls, solid vinyls, textured vinyls, custom paint finishes, custom stain finishes, high pressure decorative laminate finishes and applied murals.

Shipping Information

Schedule: Series 3300 with factory standard finish, 2 weeks (over 250 lineal feet by quote). All doors with special finish (after signed approved acknowledgment received) 3 weeks.

Method of Shipment

Shipments to commercial addresses. Additional charges apply for non-commercial delivery and pre-delivery notification. Contact Office for questions.

Door Hanging Weight Averages

Series 3300:
8'0" height– 26 lbs. per lineal foot 10'0"
height– 32 lbs. per lineal foot 12'0" height–
38 lbs. per lineal foot

Architectural Specifications

All Noise Control Series 3300 Acoustical Folding Doors (FSTC 33/Field) shall be rigid panel pantograph style, with panels connected continuously along top and bottom by a steel hardware hinging.

A system of machined/engineered gimbal clips incorporating a ball-bearing roller system shall be used to link the facing walls. This system shall maintain a uniform expanded position. Extruded vinyl seals shall securely connect all adjoining panels, top to bottom. Continuous vinyl sweeps shall be applied to both pantographs at top and bottom of all doors. An acoustical liner of inorganic material shall be applied to both interior faces in a configuration to create individual sound absorptive chambers. The Series 3300 door shall be suspended from aluminum extruded overhead track with a wood ceiling guard molding supplied as standard. All necessary hardware shall be included for normal installations.

How All Noise Control Packaging Even Protects Your Reputation

Because our accordion doors are often the final piece of a project's puzzle, the last thing you need inhibiting your project's completion is a door arriving damaged. Knowing this, we individually carton doors that are up to 15' wide. All Series 3300 doors are always wood crated, thus ensuring everything possible is done to have all pieces arrive undamaged.

The All Noise Control Guarantee

All Noise Control doors are custom made to fit each opening and warranted against failure due to defective materials or workmanship.



Employee-Owned

You're assured a precise level of workmanship, service and long-term value with each order because every All Noise Control employee shares in the success of a job well done.

Series 3300 Product Specifications

Complete Product Specifications: Please visit www.AllNoiseControl.com

Panels: 4-1/4" wide by 1/4" thick Vinyl-Lam or hardwood veneer faces.

Panel Connectors: Flexible vinyl, color-coordinated to panel selection.

Track: 2-7/16" x 1-3/4" aluminum, clear finish. (Heavy duty aluminum ceiling guard with separate track available)

Sound Seal: Dual-wall door with internal sound absorbent material, flexible vinyl sweep strips mounted on top and bottom of the door. Wood molding mounted on both sides of track forming 11-5/8" wide sweep surface.

Wheels: Nylon wheel on steel axle with ball bearings supplied as standard..

Lead Posts: 2-7/8" x 4-1/2" aluminum, color-coordinated to panel connectors.

Jamb Molding: 2-1/8" wide by 15/16" deep aluminum.

Handles: Molded PVC with finger recess.

Latch: Deadlatch with thumbturn two-sides.
(Keylock option available)

Width: No limitation. (Intermediate rolling post[s] required on doors exceeding 15')

Height: Vinyl-Lam up to 12'-1". Hardwoods up to 10'-1".

Stacking Space: 2" per foot plus 4-1/2" for lead post.